

HEMOMATIK Sweden

Liquid level switch

Art.nr. HSCB-3

1=....., 2=....., 3=..... (mm)

Drawing nr. HSCB-3

Rev. 5

Approved MEM 020615

Scale 1:2


Specify S or O switch

Date 970919



Sign. MEM

For switchpointsmm, see label

Rev. date 180426

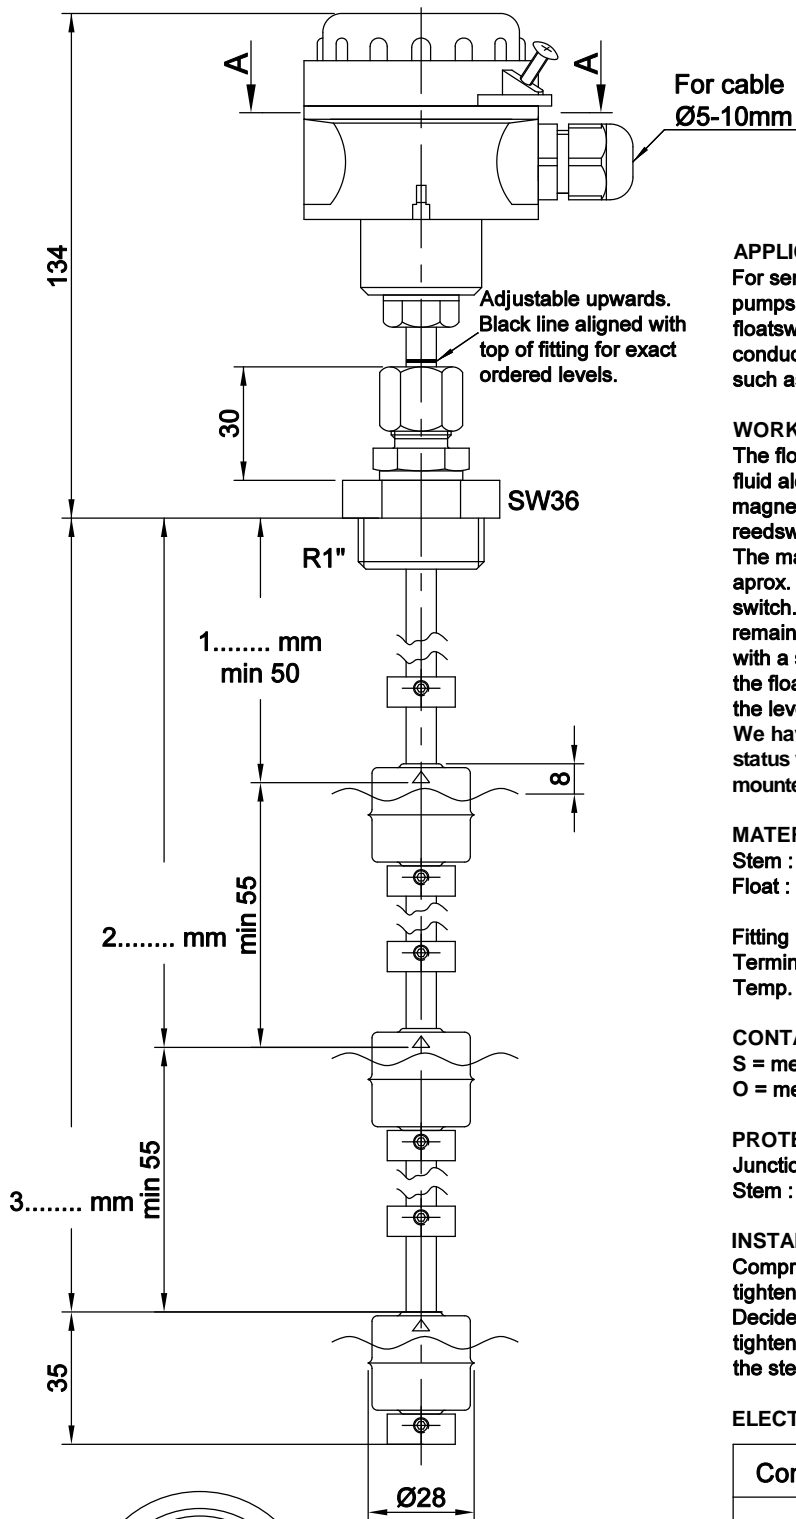

1 2 3 4 5 6

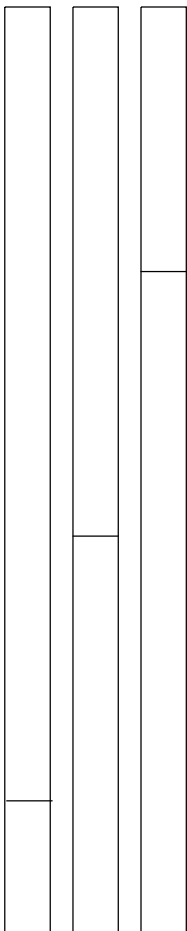

Section A-A

For cable
Ø5-10mm

APPLICATION

For sensing off liquid levels to activate pumps or valves via relays or PCs, a floatswitch works equally well with conductive as with non-conductive fluids such as oils.

WORKING PRINCIPLE

The float contains a magnet. It follows the fluid along the stem. The stem is a non magnetic material with 1 to 5 built-in reedswitches. The magnet activates each reedswitch for approx. 10 mm. This is called a passing switch. To assure that the contact status remains unchanged the stem is provided with a stop ring below respectively above the float. This allows to determine whether the level is rising or falling. We have chosen to define the contact status with empty tank and with the thread mounted in the upwards position.

MATERIALS

Stem : SUS-316
Float : SUS-316, density 0,75
max pressure 10 bar
Fitting : SUS-316
Terminanbox : PA6
Temp. max : Oil +110°C, Water +110°C

CONTACT SYMBOLS

S = means NC low, NO going upwards
O = means NO low, NC going upwards

PROTECTION DEGREE

Junction box : IP67
Stem : IP68

INSTALLATION

Compression fitting is delivered not tightened. Decide and adjust level, once the nut is tightened the compression ring is firm on the stem.

ELECTRICAL DATA

Contact rating *	20 VA
max voltage	50 V AC/DC
max current	0.8 A

* = resistive load

Note. Above values are for resistive loads. Mechanical life is 30 millions. Use series resistor for lamp load, or other suitable protection for inductive loads if the rating is higher than 1/10 of the values above.

Rights to the design and drawing belongs to HEMOMATIK Sweden, copyright ©

■ = Switch closed

□ = Switch open