

# HEMOMATIK

Sweden

Liquid level switch  
adjustable for Petroleum barrel

Art.nr. MFS17A-1-O

Drawing nr. MFS17A-1-O

Rev. 3

Approved P.L. 980610

Scale 1:1

Only for use in liquids with density higher than 0.8


Date 940916

Sign. MEM

For switchpoint .....mm, see label

Rev. date 980113

blue  
brown

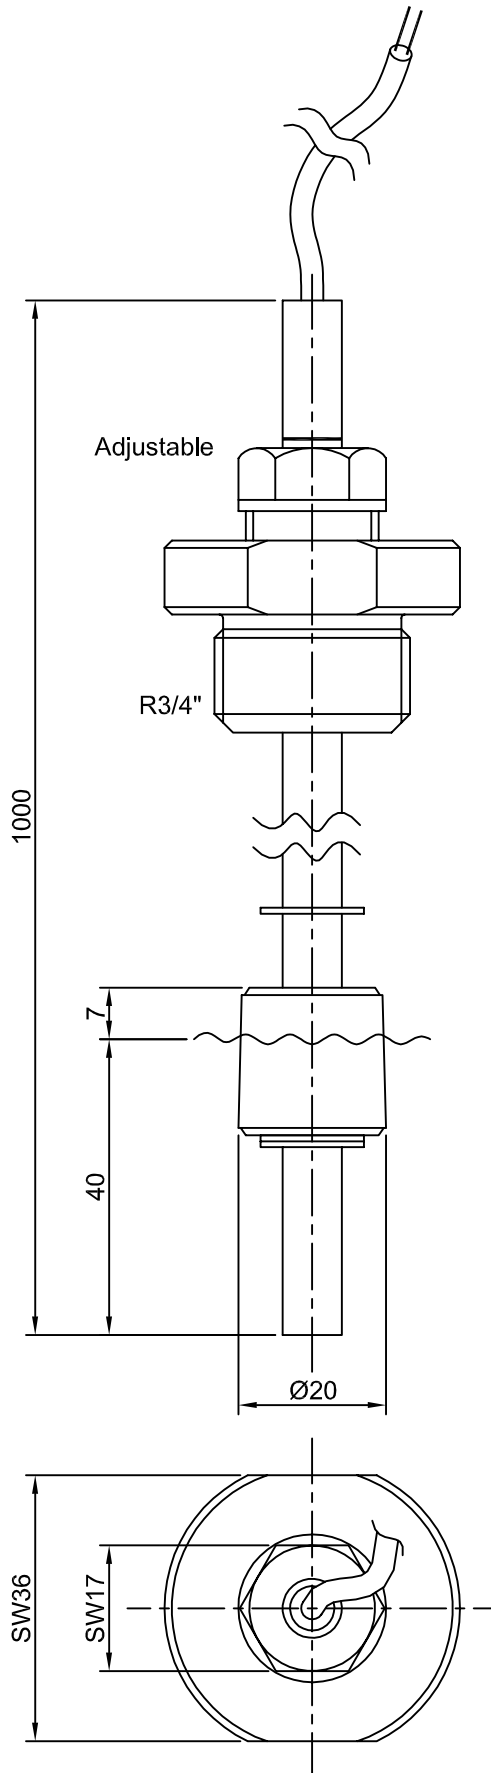

■ = Switch closed

□ = Switch open

## APPLICATION

For sensing off liquid levels to activate pumps or valves via relays or PCs, a floatswitch works equally well with conductive as with non-conductive fluids such as oils.

## WORKING PRINCIPLE

The float contains a magnet. It follows the fluid along the stem. The stem is a non magnetic material with 1 to 5 built-in reedswitches.

The magnet activates each reedswitch for aprox. 10 mm. This is called a passing switch. To assure that the contact status remains unchanged the stem is provided with a stop ring below respectively above the float. This allows to determine whether the level is rising or falling.

**We have chosen to define the contact status with empty tank and with the thread mounted in the upwards position.**

## MATERIALS

Stem : Brass  
Float : BUNA-N (nitrofuel)  
Fitting : PP  
Cable : 5m / PUR 2x 0.5mm<sup>2</sup>  
Temp. max : Oil +100°C, Water +80°C

## CONTACT SYMBOLS

**S** = means NC low, NO going upwards  
**O** = means NO low, NC going upwards  
**V** = change over

## ELECTRICAL DATA

Contact rating *	10 VA
max voltage	50 V
max current	0.5 A

\* = resistive load

Note. Above values are for resistive loads. Mechanical life is 30 millions.

Use series resistor for lamp load, or other suitable protection for inductive loads if the rating is higher than 1/10 of the values above.