

# 6431 & 6439 Bellows

- Ideal for hand or foot operation
- Large air volume for ease of operation
- Choice of colours
- Available with plastic base plate for added stability or permanent fixing
- Side or base entry tube outlet




## General specifications

Standards/ approvals	n/a
Connection method	Tubing 3 mm I/D or 1.5mm I/D (back entry only)
Pressure range	Works with 6871, 6872, 6773, 6753, 6891, 6893, 6861, 6862, 6863, 6864, 6869 – dependent on tube length

Operating temperature range	-10°C to +40°C
Body material	Thermoplastic
Weight	0.08 kg

Note: Recommended depression time is 30 seconds, for applications requiring a greater period please contact sales to discuss further.

## Reference dimensions mm

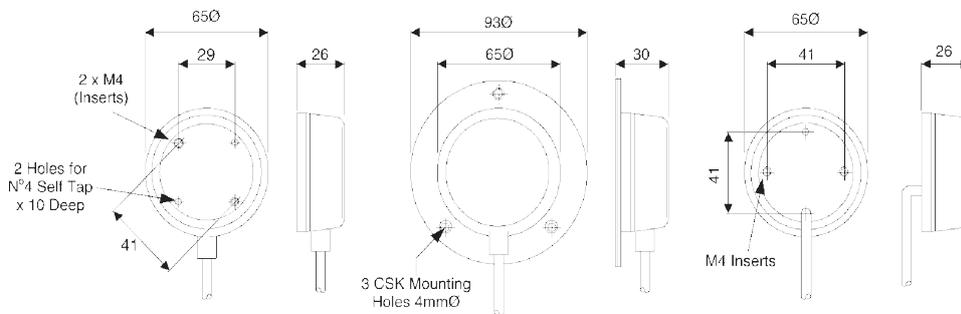

## Ordering and options

Stock models: 6431-AABC-0000  
6439-AZZC-0000

643  -     - 0000

### Model

#### Tube entry

- 1 Side entry tube
- 9 Back entry tube

#### Colour option

- |         |         |
|---------|---------|
| A Black | D Red   |
| B Grey  | F Green |
| C White |         |

#### Tube type

- A Black tubing with 3 mm I/D and 6 mm O/D
- B Clear tubing with 3 mm I/D and 6 mm O/D
- C Black tubing with 1.5 mm I/D and 3 mm O/D
- D Black curly coil with 1.5 mm I/D 3 mm O/D (please select option G from tube length section)
- Z No tube required

#### Tube length

- |         |                                    |
|---------|------------------------------------|
| A 1.5 m | E 5 m                              |
| B 2 m   | F 6 m                              |
| C 3 m   | G Curly coil tube (2.4 metre ext.) |
| D 4 m   | Z None supplied                    |

#### Mounting option

- C No mounting plate but with M4 inserts fitted
- D Grey plastic plate with mounting holes
- E Grey plastic plate without mounting holes
- F Black plastic plate with mounting holes
- G Black plastic plate without mounting holes
- H Chrome plastic plate with mounting holes
- J Chrome plastic plate without mounting holes
- Z No mounting plate & no inserts required

## Accessories

Part Number	Description
6202-0001	Single Black RAL 9005 guard
6202-0002	Single Grey RAL 7035 guard
6202-0003	Twin Grey RAL 7035 guard

