

6451 Pneumatic Hand Control



Technology Ltd

- 2,4 & 6 way variants
- Ergonomic design for comfort
- Choice of curly or straight tubing
- Soft touch buttons
- Various colours & layout options
- Suitable for use with 6891 airswitches
- Inherently waterproof




General specifications

| | |
|-----------------------------|---|
| Connection method | 1.5mm I/D tube for use with airswitches with 2mm spouts |
| Operating temperature range | -5° C to +40° C with temperature compensated airswitches |
| Body material | Thermoplastic |
| Weight | 0.2 Kg |
| Additional information | Various button colours and designs available, hook optional |

Recommended depression time is 30 seconds, for applications requiring a greater period please contact sales to discuss further.

Reference dimensions in mm

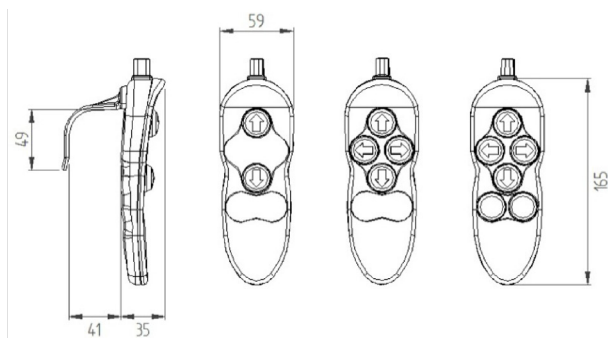

Ordering and options

6451 - [] [] [] [] - [] [] [] []

| | | |
|----------------------|---------------------------|---------------------------|
| Model | | |
| Body - | A 2 Button | C 6 Button |
| | B 4 Button | |
| Hook - | | |
| | A No hook fitted | B Hook fitted |
| Buttons - | | |
| | A Grey (plain) | C Grey (arrows) |
| | B Blue (plain) | D Blue (arrows) |
| Tube - | | |
| | A Straight 1.5 metres | B Curly coil 2.3 metres |
| Connectors - | | |
| | A No connector | B Panel mount style |
| Accessories - | | |
| | A No accessories | C 4 x 6891-0013 Airswitch |
| | B 2 x 6891-0013 Airswitch | D 6 x 6891-0013 Airswitch |



Herga Technology Ltd - Northern Way - Bury St. Edmunds - Suffolk - IP32 6NN - UK
 sales@herga.com • www.herga.com • +44 (0)1284 701422

Subject to change without notice